

750-S SERIES LOW TEMPERATURE HOT FOOD HOLDING CABINETS




- HALO HEAT...a controlled, uniform heat source that gently surrounds food for better appearance, taste, and longer holding life.
- Holds hot food hot...meat, poultry, fish, potatoes, casseroles, vegetables, rolls, etc.
- Close temperature tolerance and even heat application maintain ideal serving temperatures throughout the cabinet.
- Stainless steel interior resists corrosion.
- Available in reach-in or pass-through design.
- Casters provide easy mobility.
- Can be stacked with an identical unit or cook/hold oven to save space.
- Antimicrobial handle retards the growth of illness-causing pathogens.
- Digital control senses temperature drops faster, providing quick heat recovery time.
- Door venting holds crispy food better.

Short Form Spec


Alto-Shaam single compartment 750-S hot food holding cabinet is constructed with a stainless steel exterior and stainless steel door with magnetic latch. The Simple control consists of an on/off power switch; up and down arrow buttons with a temperature range of 60°F to 200°F (16°C to 93°C); heat indicator light; temperature display button, and digital display. Included are two (2) chrome plated side racks with eleven (11) pan positions spaced at 1-3/8" (35mm) centers, three (3) chrome plated wire shelves, and one (1) set of 2-1/2" (64mm) heavy duty casters – 2 rigid and 2 swivel with brake.

MODEL 750-S Hot food holding cabinet

DELUXE CONTROL OPTION



- Solid state electronic control option simplifies temperature setting and has a clear, easy-to-read LED display and includes our patented SureTemp™ heat recovery system. SureTemp™ reacts immediately to compensate for any loss of heat whenever the door is opened.
- Deluxe control is also available with six independent multiple timers for each compartment to facilitate "first-in, first-out" concept.
- Deluxe control with internal temperature probe.



ANSI/NSF 4



IP X3



FACTORY-INSTALLED OPTIONS

- Electrical Choices
 - 120V
 - 208-240V
 - 230V
- Cabinet Choices
 - Reach-In, standard
 - Pass-Through, optional

- Door Choices
 - Solid Door, standard
 - Window Door, optional
- Door Swing Choices
 - Right-hand swing, standard
 - Left-hand swing, optional

Note: Pass-through cabinets cannot have all doors hinged on the same side.

ADDITIONAL FEATURES

- Stackable design
Stackable with 750 or 767 Series single compartment ovens and holding cabinets, XL-300 Xcelerate® or CTX4-10 Combitherm®. Order appropriate stacking hardware.

W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.

PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA

FAX: 262.251.7067 800.329.8744 U.S.A. ONLY


www.alto-shaam.com





750-S SERIES

LOW TEMPERATURE HOT FOOD HOLDING CABINETS

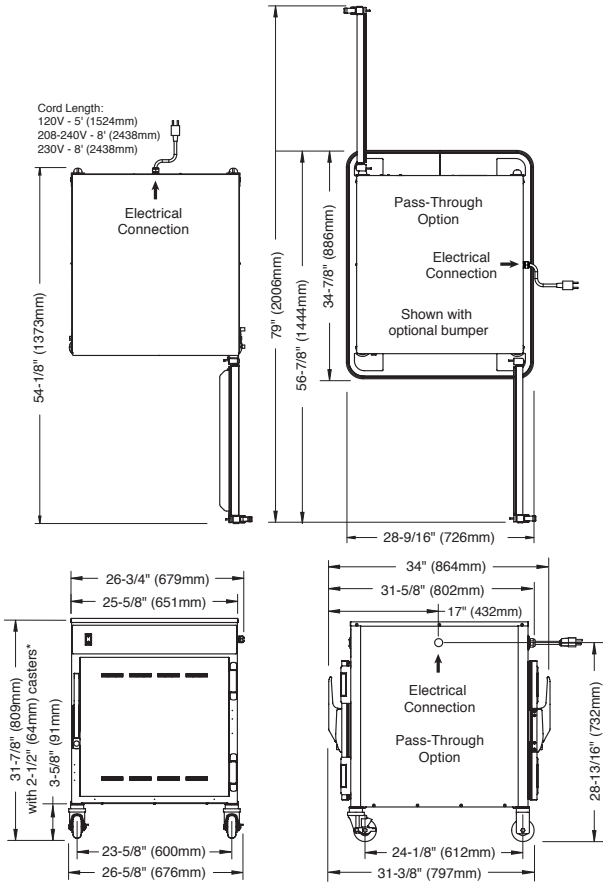

*33-3/8" (848mm) - with optional 3-1/2" (89mm) casters
 *35-1/4" (894mm) - with optional 5" (127mm) casters
 *33-3/4" (857mm) - with optional 6" (152mm) legs

DIMENSIONS: H x W x D
EXTERIOR: 31-7/8" x 26-5/8" x 31-3/8" (809mm x 676mm x 797mm)
PASS-THROUGH: 31-7/8" x 26-3/4" x 33-13/16" (809mm x 679mm x 858mm)
INTERIOR: 20" x 21-15/16" x 26-1/2" (507mm x 556mm x 673mm)

ELECTRICAL							
VOLTAGE	PHASE	CYCLE/HZ	AMPS	kW		CORD & PLUG	
120	1	60	9.0	1.1		NEMA 5-15P, 15A-125V PLUG	
208	1	60	3.9	.81		NEMA 6-15P, 15A-250V PLUG (U.S.A. ONLY)	
240	1	60	4.5	1.1			
230	1	50/60	4.3	1.0		PLUGS RATED 250V	
	CEE 7/7		CH2-16P		BS 1363		AS/NZS 3112

PRODUCT/PAN CAPACITY	
120 lbs (54 kg) MAXIMUM	
VOLUME MAXIMUM: 100 QUARTS (95 LITERS)	
FULL-SIZE PANS:	GASTRONORM 1/1:
Ten (10) 20" x 12" x 2-1/2"	530mm x 325mm x 65mm
Six (6) 20" x 12" x 4"	530mm x 325mm x 100mm
Four (4) 20" x 12" x 6"	530mm x 325mm x 150mm
FULL-SIZE SHEET PANS (ON WIRE SHELVES ONLY):	
Up to Six (6) 18" x 26" x 1" - WITH ADDITIONAL WIRE SHELVES	

CLEARANCE REQUIREMENTS	
REAR	3" (76mm)
TOP	2" (51mm)
EACH SIDE	1" (25mm)

WEIGHT	
NET: 157 lb (71 kg)	SHIP: (EST.) 228 lb (103 kg)
CARTON DIMENSIONS: (L x W x H)	
35" x 35" x 41" (889mm x 889mm x 1041mm)	

INSTALLATION REQUIREMENTS	
— Appliance must be installed level.	
— The appliance must not be installed in any area where it may be affected by steam, grease, dripping water, extreme temperatures, or any other severely adverse conditions.	
— Appliances with casters and no cord or plug must be secured to the building structure with a flexible connector.	

OPTIONS & ACCESSORIES	
<input type="checkbox"/> Bumper, Full Perimeter (NOT AVAILABLE WITH 2-1/2" CASTERS)	5010371
<input type="checkbox"/> Handle, Push/Pull	55662
Carving Holder	
<input type="checkbox"/> Prime Rib	HL-2635
<input type="checkbox"/> Steamship (Cafeteria) Round	4459
Casters, Stem - 2 RIGID, 2 SWIVEL W/BRAKE	
<input type="checkbox"/> 5" (127mm)	5004862
<input type="checkbox"/> 3-1/2" (89mm)	5008017
<input type="checkbox"/> Door Lock with Key	LK-22567
<input type="checkbox"/> Drip Pan, with Drain, 1-11/16" (43mm) deep	14831
<input type="checkbox"/> Drip Pan, without Drain, 1-5/8" (41mm) deep	1014684
<input type="checkbox"/> Drip Tray - External	5010391

<input type="checkbox"/> Legs, 6" (152mm), Flanged (SET OF FOUR)	5011149
<input type="checkbox"/> Pan Grid, Wire - 18" x 26" PAN INSERT	PN-2115
<input type="checkbox"/> Security Panel with Lock	5013936
Shelves	
<input type="checkbox"/> Chrome Wire, REACH-IN	SH-2105
<input type="checkbox"/> Chrome Wire, PASS-THROUGH	SH-2327
<input type="checkbox"/> Stainless Steel, Flat Wire, REACH-IN	SH-2324
<input type="checkbox"/> Stainless Steel, Rib Rack	SH-2743
Stacking Hardware	
<input type="checkbox"/> Over or under TH, SK, S-Series	5004864
<input type="checkbox"/> Under XL-300 Xcelerate®	5019677
<input type="checkbox"/> Under XL-400 Xcelerate®	5019678
<input type="checkbox"/> Under CTX4-10 Combitherm®	5019679



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.

PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA FAX: 262.251.7067 800.329.8744 U.S.A. ONLY

www.alto-shaam.com

