

# Sliding door and forward tilting

# Sliding door

- · Large door opening for easy loading and unloading
- No space required in front of the dryer for door opening
- · Easy to operate

# Forward tilting

- · Easy unloading no manual handling
- Rotation of drum while tilting the dryer for easy unloading
- · Only available with Sliding door

## Frequency controlled motor

 Adjustment of drum speed for correct drop of garments – optimises drying time and saves energy

### Indicator lamp for finished drying cycle

· Overview, when finished drying cycle

S Decrobs

S Decrobs

Images shown are a representation of the product only and variations may occur.


For technical information regarding the tumble dryers, see datasheet for T4900 and T41200.

Shipping data	T4900	T41200
Basic Dryer With Sliding Door With Sliding Door and tilt Heating unit, gas/steam/elect. Tilt unit	545 kg 599 kg 651 kg 39/50/42 kg 66 kg	580 kg 634 kg 686 kg 46/50/42 kg 66 kg
Dimensions in mm		
A Width B Depth C Height D (with top removed) E F G H I K L M N O P R	1320 1250 2550 1965 950 945 1360 1295 2635 1565 2140 410 1760 2435 2105 570	1320 1440 2550 1965 950 945 1360 1485 2660 1755 2140 410 1760 2435 2105 570





- 2 Door opening ø 940
- Electrical connection
- Gas connection
- 5 Steam connection
- Condensate connection
- Exhaust connection ø 315


Flexible connections to be used for gas/steam and exhaust when installing a dryer with tilt option.

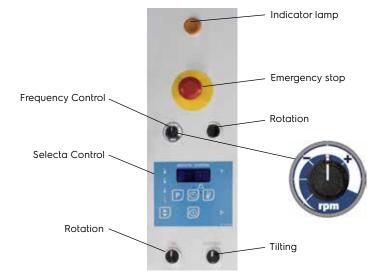



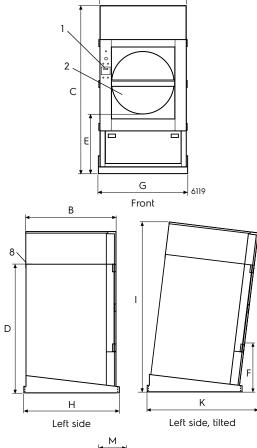





Art. No. 438903241/2020.09.01

We reserve the right to alter specifications without notice.